


### Packaging Contents

- A. Diamond-shaped plate to 38mm ball
- B. Diamond-shaped plate
- C. Steel screws
  - o Black zinc-plated washers
  - o Full-threaded locknuts

**Important:** Clean the mounting surface before installation. Make sure it is free of dirt, dust, and grease.


### Install the Mounting Plates

Position the front and back plates around the forklift guard. Align the mounting holes, insert the screws, then secure with the washers and locknuts. Tighten firmly.

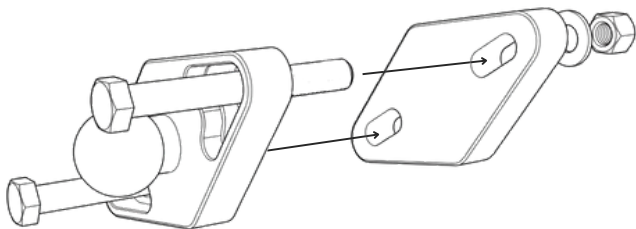


### Completed Installation

Refer to the image below for the fully assembled mount properly installed on the forklift.

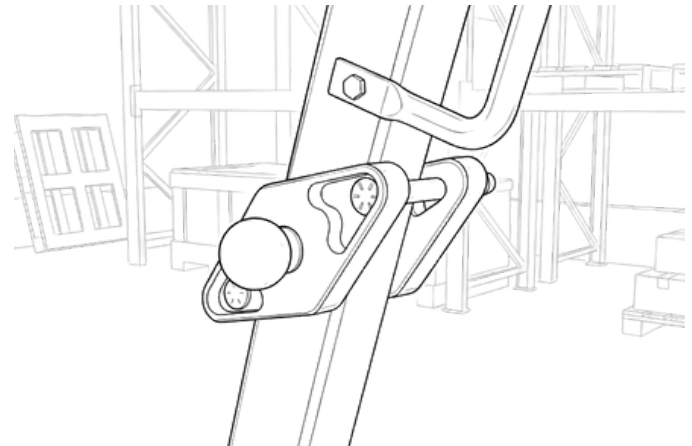

### Attach the Shaft Arm

Attach a compatible shaft arm to the mounted base, then tighten the adjustment knob to secure it in position.

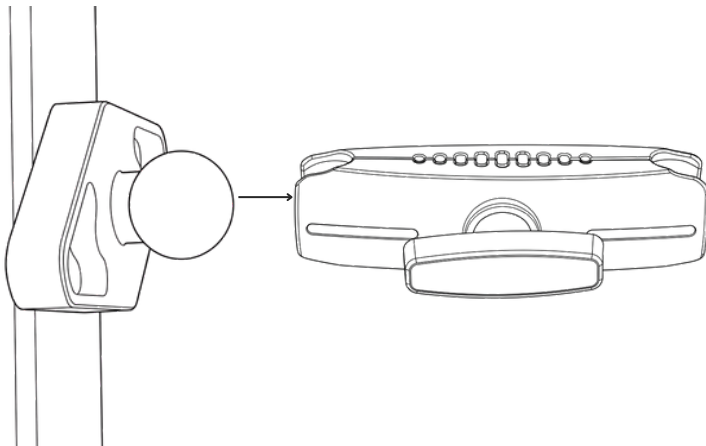

**WARNING**  
CHOKING HAZARD - Keep out of reach from children under 8 yrs. as they can choke or suffocate on parts included with this system.

**WARNING**  
Arkon® is not responsible for any damages caused to your device or yourself due to the installation or use of this mount. Do not install Arkon® products near areas that interfere with operation of vehicles. Arkon® assumes no responsibility or liability for injury or death as a result of failure to install in a safe location. Arkon® is not responsible for any damages caused to vehicles, product, or people due to the installation or use of this product.

